



SEISMIC ASSESSMENT OF ALGERIAN BRIDGE

F. Kehila ⁽¹⁾, M. Remki ⁽²⁾, H. Bechtoula ⁽³⁾, A. Kibboua ⁽⁴⁾

⁽¹⁾ Senior Researcher, National center of applied research in earthquake engineering CGS, foudad.kehila@gmail.com

⁽²⁾ Senior Researcher, National center of applied research in earthquake engineering CGS, musremki@gmail.com

⁽³⁾ Senior Researcher, National center of applied research in earthquake engineering CGS, bechhakim@yahoo.com

⁽⁴⁾ Senior Researcher, National center of applied research in earthquake engineering CGS, a_kibboua@hotmail.com

Abstract

This study focused on the probabilistic risk assessment of reinforced concrete piers bridges subjected to ground motion excitation. In order to assess the vulnerability of Piers Bridge, a case study of a typical Algerian highway bridge is presented, illustrating the seismic performance and damage evaluation method. Pushover and incremental dynamic analysis using several earthquake records is implanted to determine the fragility curves reflecting the probability of various damage occurrences. These fragility curves provide the probability of exceeding the multiple damage states for a given intensity of ground motion excitation. To develop the fragility curves, a nonlinear static pushover and incremental dynamic time-history analysis have been performed using the SeismoStruct nonlinear analysis program for bridge model to develop fragility curve, this study includes comparison between real or artificial ground motions selection, IDA is performed using a set of 18 real ground acceleration records and 8 artificial ground acceleration records of similar seismo/geological origins. Finally, the developed fragility curves can be used to assess the seismic performance of Piers Bridge and help to decision making for effective retrofitting technique.

Keywords: fragility curve, incremental dynamic analysis, seismic assessment, damage state



1. Introduction

Seismic vulnerability assessment and development of fragility curves for existing bridges are a matter of great concern among the researchers in the recent years ([1], [2], [3]). Fragility curves of bridges can be developed empirically as well as analytically. Empirical fragility curves are usually developed based on the damage reports from past earthquakes. When actual bridge damage and ground motion data are not available, analytical fragility curves can be used to assess the performance of bridges ([4], [5]).

In Algeria, neither bridge damages nor their performances have been reported during the previous earthquakes that have struck the country, aside from those observed during the 2003 Zemmouri earthquake. According to the ASCE post-earthquake investigation report (ASCE 2004), the most significant bridge damages were due to the superstructure moving off their bearings and dropping onto the bents caps, columns damage observed in old bridges, shear key at some metallic girders, superstructure rotation, vertical movement, girder movement and buckling as well as some damage at seat-type abutment and to bin-type wing wall. Nevertheless, the bridges have performed well and no long interruption of their serviceability was noticed during the earthquake. In this respect, due to the lack of information from past earthquakes damage on bridges, it is not possible to derive fragility curves empirically for the typical bridge piers in Algeria. Therefore, fragility curves have been developed analytically from nonlinear dynamic analyses of typical bridge piers. Since damage states are mostly related to structural capacity (C) and the ground motion intensity parameter is related to structural demand (D), the probability of failure (pf) gives the probability that the seismic demand will exceed the structural capacity. Mander and Basoz [6] have presented the theory of fragility curves for highway bridges based on uncertainties in various bridge parameters to evaluate seismic vulnerability of typical bridges. While Ghobarah et al. [7] have quantified numerically the damage states from the dynamic responses of the bridges under various levels of ground motion excitation; Hwang et al. [8] described a detailed procedure for analytical development of fragility curves.

The main objective of this study is to develop analytical fragility curves for typical Algerian reinforced concrete bridge piers based on a numerical approach taking into account, the structural parameters and the variation of the input ground motion. Prior to the newly established Algerian seismic regulation code for bridge structures RPOA 2008 [9], the bridge piers have been designed using the seismic design coefficient method. In this respect, seismic coefficients equal to 10% of the total weight in the horizontal direction and 7% of the total weight in the vertical direction have been used to design the bridge piers. By using the Incremental Dynamic Analysis (IDA) [10], this analysis method which can be used for more detailed seismic performance predictions of structures subjected to different seismic excitation levels. It involves numerous inelastic times history analyses performed using a set of ground motion records, each scaled (up or down), and to study different seismic intensity levels. IDA provides valuable information regarding possible structural responses, required for the probabilistic seismic performance assessment of structures and seismic risk analysis (e.g., development of fragility curves and prediction of the annual rate of collapse, etc).

2. Bridge properties and modeling assumptions

A typical structural bridge pier in Algeria has been selected for the fragility analysis, considering these typical RC bridge piers. As it deals with piers that are not designed according to the 2008 new Algerian seismic design code for bridges [10], it is assumed that only the size and the reinforcement of the piers can be changed with other conditions such as their height, the length and the weight of the superstructure.

The structures studied include regular 4-span bridge with an overall length of 116.80 m. The superstructure consists of a longitudinally reinforced concrete deck slab of 10 m wide and it is supported by three sets of columns and by an abutment at each end. Each set has three columns with a circular cross section of 1.20 m diameter.

The substructure of bridge consists of rigid abutments at the ends in addition to reinforcement concrete piers. The longitudinal view of the bridge and the cross section can be seen in fig.1.

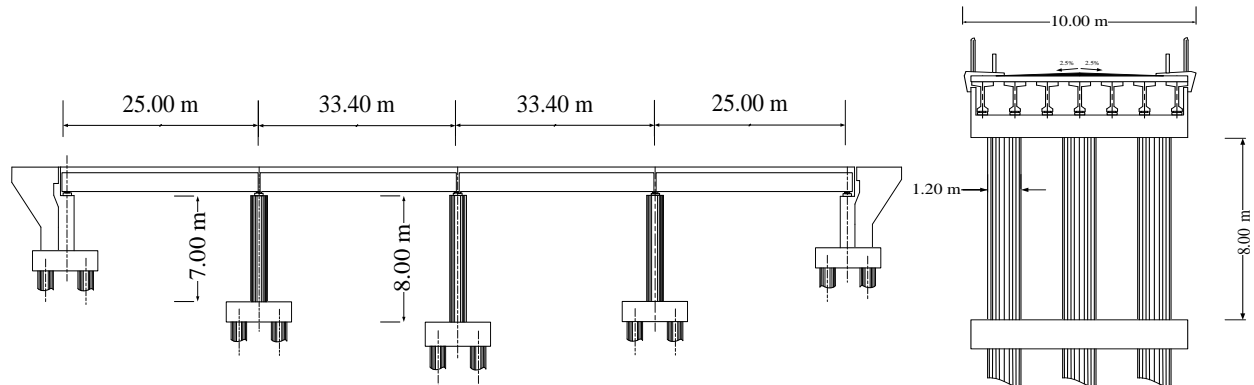


Fig. 1 – Longitudinal view and Cross-section of the selected bridge

The bridge is modeled with finite elements using Sismostruct software [11]. A three dimensional view of the model is shown in fig.2. The bridge is constructed of linear beam column elements representing the superstructure and nonlinear column fiber section elements for the columns, the superstructure is assumed to behave linearly and P-delta effects are included in the analysis.

The bridge columns are assumed to behave nonlinearly and defined as fiber section elements. For core and cover concrete, abutment is modeled by using springs in longitudinal axis of superstructure and fixed supports against rotation and vertical translation.

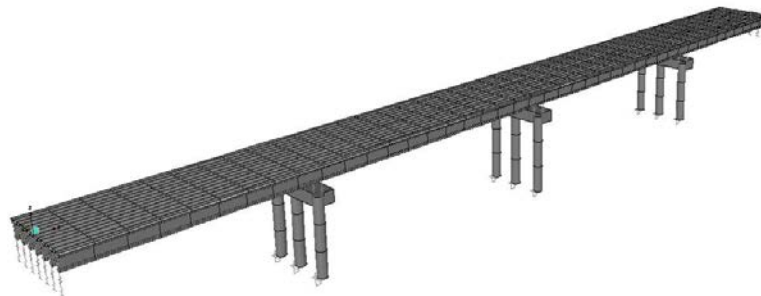


Fig. 2 –Three Dimensional view of Finite Element model of the bridge

For the dynamic time history analysis of the pier model, fiber modeling technique [11] was used to incorporate the material inelasticity and geometric nonlinearity. The complete pier section was subdivided into approximately 200–300 section fibers each provided with the uniaxial material properties, as shown in fig.3. The sectional stress-strain state of the pier is achieved by integrating the nonlinear uniaxial stress-strain response of the individual fibers.

Concrete model was defined using the constitutive relationship proposed by Mander et al [12] and the cyclic response theory proposed by Martinez-Rueda and Elnashai [13]. The steel stress strain relationship proposed by Menegotto and Pinto [14] and the isotropic hardening rules by Filippou et al. [15] were used in the modeling. The confinement provided by transverse and cross tie reinforcement was modeled with a confinement factor, defined as the ratio between the confined and unconfined compressive stress of concrete. In SeismoStruct [11], the confinement factor is calculated using the confinement model proposed by Mander et al [12]. For the cover concrete, the confinement factor was considered to be 1.0 or defined as non-confined concrete.




Fig. 3 – Fiber element model of pier section

3. Ground motions

In order to perform IDA, in this previous study two analyses were developed, the first analyze used a real ground motion records and the other use a suite of artificial ground motion records.

18 ground motion records are used and adopted for this study to order to provide a sufficient accuracy of seismic demands. These earthquakes have Richter magnitudes in the range of 5.6-7.6. Fig. 4 shows response spectra for each of the 18 earthquake ground motions; these ground motions are used in the analysis listed in Table 1. In this study PGA is considered as the Intensity Measure (IM) for its efficacy, utility and adequacy in vulnerability assessment. The PGA of the ground motions range from PGA 0.194 to PGA 0.781.

Table 1 – Selected ground motion records for dynamic incremental analysis

N°	Earthquake	Date	Magnitude	PGA (g)
01	Kobe, Japan	17.01.1995	7.2	0.345
02	Friuli, Italy	06.05.1976	6.5	0.351
03	Kocaeli, Turkey	17.08.1999	7.4	0.349
04	Loma Prieta, United state	18.10.1989	7.1	0.367
05	Chi-Chi, Taiwan	20.08.1999	7.6	0.361
06	Northridge, United state	17.01.1994	6.7	0.568
07	Imperial Valley, United state	15.10.1979	6.9	0.315
08	Landers, United state	28.06.1992	7.3	0.781
09	El Centro, United state	18.05.1940	6.9	0.348
10	Ulcinj, Montenegro	15.04.1979	6.9	0.285
11	Cherchell, Algeria	29.10.1989	5.7	0.230
12	Sakaria, Turkey	17.08.1999	7.4	0.628
13	Manjil, Iran	21.06.1990	7.4	0.515
14	Keddara, Algeria	21.05.2003	6.8	0.332
15	Hussein Dey, Algeria	21.05.2003	6.8	0.269
16	Trinidad (Morgan Hills), United state	24.06.1984	6.2	0.194
17	Hollister, United state	09.04.1961	5.6	0.195
18	Dar El Baida, Algeria	21.05.2003	6.8	0.539

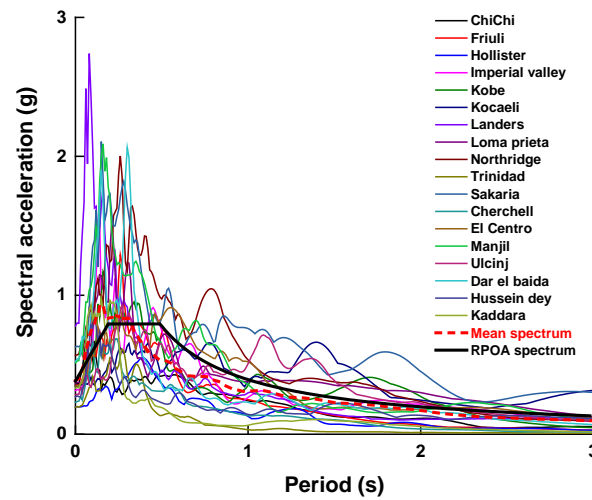


Fig. 4 – Ground Motions selected for case study

For the second analyze a series of artificial acceleration records was created for Incremental dynamic analysis. These records are determined to follow the RPOA 2008 [10] design spectrum spectral acceleration curve (see in fig.5) within a defined range. According to RPOA 2008 [10], the 5%-damped elastic response spectrum of the design seismic action shall be used for the fitting and the defined period range.

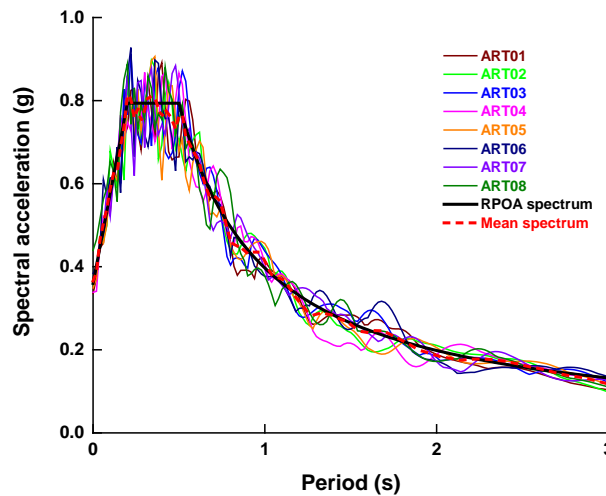


Fig. 5 – Artificial ground Motions selected for case study

4. Damage levels

The probability of entering a damage state an input ground motion intensity parameter is expressed by fragility curves. Different forms of Engineering Demand Parameter (EDPs) are used to measure the DS of the bridge components.

Several damage states were considered in the seismic evaluation of the bridges under study including yielding, serviceability, bar-buckling and collapse. The yielding and serviceability damage states for the bridge columns were predicted using the method described by Priestley et al [16]. A study by Berry and Eberhard [17] provides some empirical equations to estimate the engineering demand parameters including drift ratio, plastic rotation, and strain in the longitudinal bars for circular bridge columns based on the properties of typical columns.



In this study damage levels were considered in accordance with ATC [18] and FEMA 273 [19] guidelines and limit drift ratio was accepted as the damage measure. For RC Piers Bridge limit drift ratio are summarized in Table 2.

Table 2 – Performance objectives and corresponding drift limit [18], [19]

Performance Objectives	Damage	Drift Limit
Immediate Occupancy	Minor damage	<0.2%
Damage Control	Repairable	<0.5%
Life Safety	Irreparable	<1.5%
Limited Safety	Extensive	<2.5%
Collapse Prevention	Near Collapse	>2.5%

5. Incremental nonlinear dynamic analysis IDA

Incremental nonlinear dynamic analysis (IDA) is a parametric analysis method that is useful for estimating structural performance under several ground motions. It mainly involves producing one or more curves of damage measure versus intensity measure under the effect of scaled ground motions as a result of several nonlinear dynamic analyses. These ground motions can be selected from real records of earthquakes or can be generated artificially. Real records are more realistic since they include all ground motions characteristics such as amplitude, frequency, duration, energy content, number of cycles and phase. For this study, the maximum drift ratio is assumed as the best damage indicator and peak ground acceleration (PGA) is selected as the ground motion intensity measure. Under each ground motion, nonlinear time history analyses were conducted while scaling the PGA; of chosen ground motion incrementally every 0.05g, until structural instability is obtained.

The SeismoStruct computer program [11] was utilized for non-linear dynamic analysis and the maximum drift ratio is recorded at the end of each analysis. The relationship between the maximum drift ratio and the corresponding PGA was obtained, which creates the IDA curves for a certain structure under the specified ground motion. The IDA curves of sample frames are shown in fig.6.

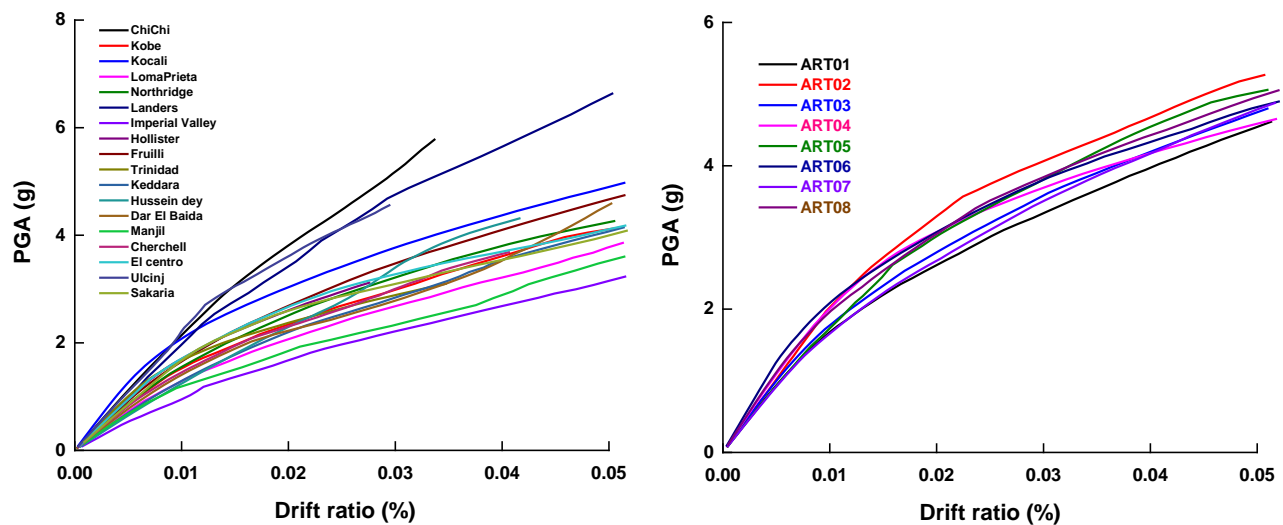


Fig. 6 – Result of the IDA analysis (real-artificial)



6. Fragility curves

Fragility is modelled by a lognormal cumulative distribution function where the structural demand and capacity are assumed to be log-normally or normally distributed. In this study, probabilistic seismic demand models are used to derive the fragility curves. The ground motions are scaled to selective intensity levels and an Incremental Dynamic Analysis (IDA) is conducted at each level of the intensity. A regression analysis is carried out to obtain the mean and standard deviation for each limit state by assuming the power law function [20], which gives a logarithmic correlation between median EDP and selected IM:

$$\overline{EDP} = a(IM)^b \quad (1)$$

$$\ln(\overline{EDP}) = b \ln(IM) + \ln(a) \quad (2)$$

Where, a and b are unknown coefficients which can be estimated from a regression analysis of the response data collected from the nonlinear time history analysis. In order to create sufficient data for the cloud approach incremental dynamic analysis is carried out instead of nonlinear time history analysis. The dispersion of the demand, $\beta_{EDP/IM}$, conditional upon the IM can be estimated from Eq. (3), [21].

$$\beta_{EDP/IM} = \sqrt{\frac{\sum_{i=1}^N [\ln(EDP_i) - \ln(a(IM_i)^b)]^2}{N - 2}} \quad (3)$$

With the probability seismic demand models and limit states corresponding to various damage states, it is now possible to generate the fragilities using Eq. (4),

$$P(LS \geq IM) = \Phi \left[\frac{\ln(IM) - \ln(IM_n)}{\sqrt{\beta_{EDP/IM}^2 + \beta_c^2}} \right] \quad (4)$$

$$IM_n = \exp \left(\frac{\ln(S_c) - \ln(a)}{b} \right) \quad (5)$$

$\ln(IM_n)$ is defined as the median value of the intensity measure for the chosen damage state (slight, moderate, extensive, collapse), a and b are the regression coefficients and the dispersion component is presented in Eq. (6), [22].

$$\beta_D = \frac{\beta_{EDP/IM}}{b} \quad (6)$$

Where S_c is the median and β_c is the dispersion value for the damage states of the bridge pier [21].



Fig. 7 shows the typical lognormal probability plot for RC Piers Bridge considering both two cases 18 real ground motions and 8 artificial ground motions.

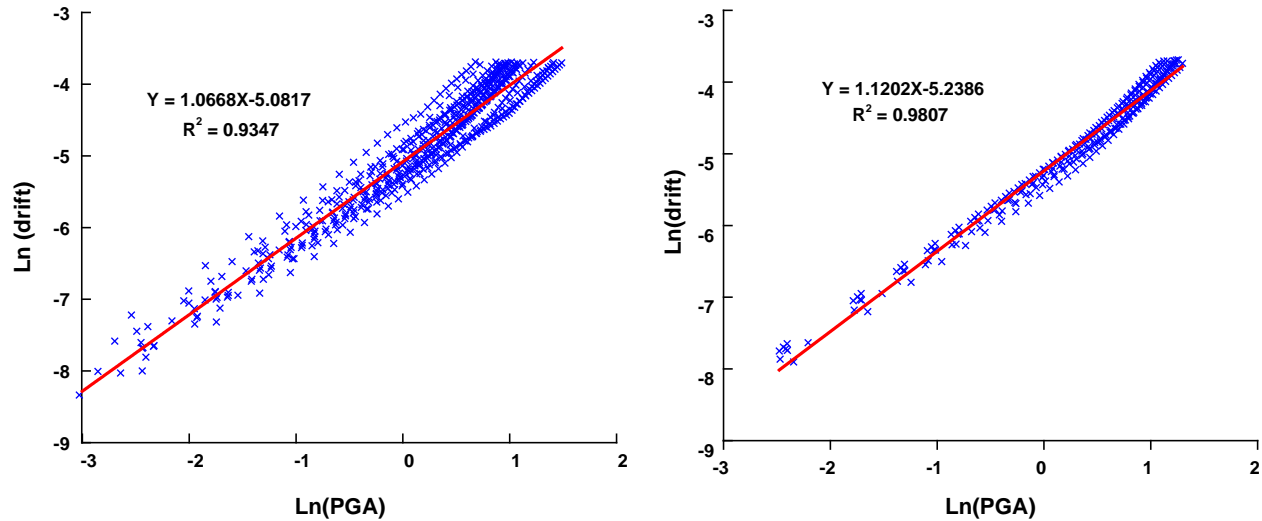


Fig. 7 – Regression analysis results for piers Bridge (real – artificial)

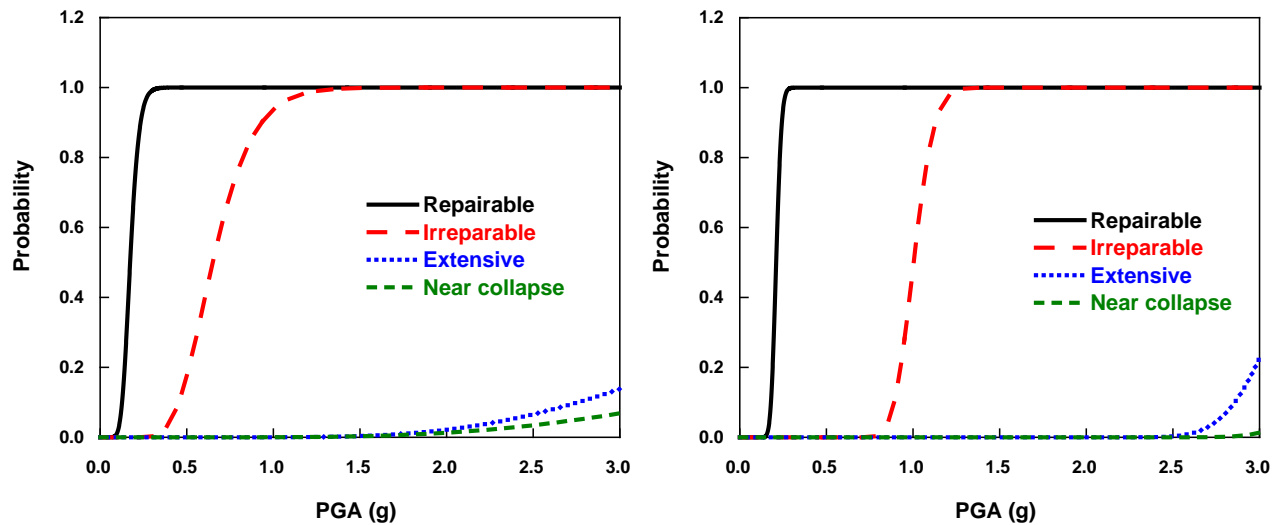


Fig. 8 – Fragility curves (real – artificial)

The fragility curves for Sample Bridge associated with those damage states are plotted in Figs. 8. Fragility curves is obtained by considering both two cases 18 real ground motions and 8 artificial ground motions. It can be observed that for involved seismic intensity levels, the fragility curves obtained show that the probability associated with the appearance of concrete cracks of piers bridge is very high, while that associated with the yielding is lower. It is also observed that the probabilities associated spalling and crushing of rebar are very low even for very high seismic intensity levels.

Fig. 9 shows the plots of analytical fragility curves of both real and artificial ground motions (dotted lines), for example, for a level of acceleration of 0.4 g, the probability of failure of concrete cracking is in the order of 100% for both real and artificial ground motions. As for yielding, for a level of acceleration of 0.6 g, the probability of failure is 39% and 0% with artificial accelerations. For other damage (spalling and crushing of rebar), the State of exceeds of damage is very low even for very high seismic intensity levels.

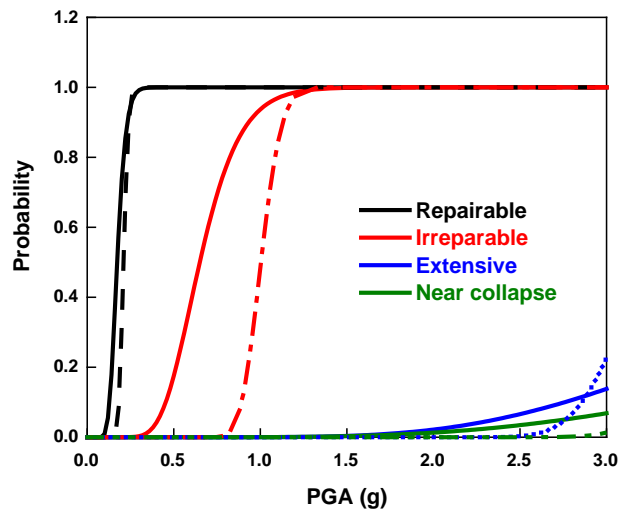


Fig. 9 – Fragility curves

7. Conclusions

Highway bridges are critical component for transportation network and play a significant role in the economic development of a country. Failure of a single link will have catastrophic impact on the whole transportation network as well as country's economy.

This paper illustrates the results of the seismic vulnerability study aimed to develop the analytical fragility curves for typical Algerian bridge piers based on numerical simulations.

Bridge piers designed with the simplified seismic design method for bridges in Algeria are analyzed, and a large number of worldwide accelerometer records from which, Algerian strong motion records and earthquake records from some major event, e.g., the 1995 Kobe, the 1994 Northridge were selected in order to get a wide range of the variation of input ground motions.

The bridge was modeled using fiber elements in SeismoStruct software. The nonlinear time dynamic analysis of the bridge were made in two stages, first considering 18 real strong motions, and then 8 artificial strong motions calibrated on seismic RPOA 2008 design spectra corresponding to the bridge site.

The displacements obtained from seismic analyzes were related to the intensity of earthquakes and damage of the structure and fragility curves was build.

For involved seismic intensity levels, the fragility curves obtained show that the probability associated with the appearance of concrete cracks of piers bridge is very high, while that associated with the yielding is lower. It is also observed that the probabilities associated spalling and crushing of rebar are very low even for very high seismic intensity levels.

The results and of this study apply only to the bridge examined in this article, depending on the assumptions that have been adopted. These conclusions cannot be generalized to other works or other sites without prior analyses.

8. References

- [1] Kurian, S.A., Deb, S.K. and Dutta, A. (2006). Seismic vulnerability assessment of a railway over bridge using fragility curves. Proceedings of 4th International Conference on Earthquake Engineering. Paper number 317.
- [2] Seongkwan, M.L., Tschangho J.K. and Seung, L.K. (2007). Development of Fragility Curves for Bridges in Korea. KSCE Journal of Civil Engineering 3:11, 165-174.
- [3] Padgett, J.E. and DesRoches, R. (2008). Methodology for the development of analytical curves for retrofitted bridges. Earthquake Engng Struct. Dyn. 37, 1157-1174.



- [4] Choi, E., DesRoches, R. and Nielson, B. (2004). Seismic fragility of typical bridges in moderate seismic zones. *Engineering Structures* 26 , 187- 199.
- [5] Nielson, B. and DesRoches, R. (2007). Analytical seismic fragility curves for typical bridges in the central and south eastern United States. *Earthquake Spectra* 3: 23,615-633.
- [6] Mander, J.B. and Basoz, N. (1999). Seismic fragility curves theory for highway bridges. *Proceedings of 5th U.S. conference of Lifeline Earthquake Engineering, ASCE*, 31-40.
- [7] Ghobarah, A., Aly, N.M. and El-Attar, M. (1997). Performance level criteria and evaluation. *Proceedings of the International Workshop on Seismic Design Methodologies for the next Generation of Codes*. Balkema: Rotterdam, 207–215.
- [8] Hwang, H., Jing, B.L. and Chiu, Y. (2001). *Seismic Fragility Analysis of Highway Bridges*. Center for Earthquake Research Information, Memphis. Ref. No. MAEC RR-4.
- [9] RPOA 2008 – Algerian seismic regulation code for bridge structures, Document Technique Règlementaire, Ministère des Travaux Publics, Algiers, Algeria.
- [10] Vamvatsikos, D., and Cornell, A. 2002. Incremental dynamic analysis. *Earthquake Engineering & Structural Dynamics*, 31(3):491-514.
- [11] Seismosoft 2015. *SeismoStruct v7.0.6 - A computer program for static and dynamic nonlinear analysis of framed structures*. Available from <http://www.seismosoft.com>.
- [12] Mander, J.B., Priestley, M.J.N., and Park, R. 1988. Theoretical stress-strain model for confined concrete. *Journal of Structural Engineering, ASCE*, 114 (8), 1804-1826.
- [13] Martinez-Rueda, J.E., and Elnashai, A.S. 1997. Confined Concrete Model under Cyclic Load. *Materials And Structures*, 30(197): 139-147.
- [14] Menegotto M and Pinto P E (1973), “Method of Analysis for Cyclically Loaded R C Plane Frame Including in Geometry and Non-Elastic Behavior of Elements Under Combined Normal Force and Bending, Symposium on the Resistance and Ultimate Deformability of Structures Acted on by Well Defined Repeated Loads”, International Association for Bridge and Structural Engineering, pp. 15-22, Zurich, Switzerland.
- [15] Filippou, F.C., Popov, E.P., and Bertero, V.V. 1983. Effects of Bond Deterioration on Hysteretic Behavior of Reinforced Concrete Joints. Report EERC 83-19, Earthquake Engineering Research Center, University of California, Berkeley.
- [16] Priestley MJN, Calvi GM and Kowalsky MJ (2007) *Displacement Based Seismic Design of Structures*, IUSS Press, Pavia, Italy
- [17] Berry, M. and Eberhard, M.O. (2007), “Damage Analysis,” Chapter 4 in “Application of the PEER PBEE Methodology to the I-880 Viaduct,” Ed. S.K. Kunnath, Pacific Earthquake Engineering Research Center Report PEER-2006-10, University of California, Berkeley, Feb. 2007, pp 45-54.
- [18] ATC 1996. Seismic evaluation and retrofit of concrete buildings. Report No. ATC-40. Redwood City, CA: Applied Technology Council.
- [19] FEMA-273 (1997) NEHRP Guidelines for Seismic Rehabilitation of Buildings. Building Seismic Safety Council, FEMA, Washington, D.C
- [20] Cornell, A. C., Jalayer, F., and Hamburger, R. O. 2002. Probabilistic Basis for 2000 SAC Federal Emergency Management Agency Steel Moment Frame Guidelines. *Journal of Structural Engineering*, 128(4): 526–532.
- [21] Ramanathan, K., DesRoches, R., and Padgett, J.E. 2012. A comparison of pre- and post-seismic design considerations in moderate seismic zones through the fragility assessment of multispan bridge classes. *Engineering Structures*, 45 559–573.
- [22] Madas P and Elnashai A S (1992), “A New Passive Confinement Model for Transient Analysis of Reinforced Concrete Structures,” *Earthquake Engineering and Structural Dynamics*, Vol. 21, pp. 409-431.